



Rack and pinion passenger/goods hoist

Without counterweight - single or twin operation

PEGA 2740 TD VFC HS

TECHNICAL DATA

CAPACITY

Payload capacity	6000lb (3000) kg
Passengers	34
Erection load	2200 lb
Speed	0-295 ft/min
Rated lifting height	656 ft
Other lifting height on request	
Maximum tie spacing	39 ft

DIMENSIONS

Internal width x length	5'6,9" x 13'1,5" ft
Internal minimum height	8'10,3" ft
Door opening w x h	5'4,6" x 6'6,7" ft
Mast section length	4'11,4" ft

ELECTRICAL DATA

Voltage	380-460, 3 phase, 60	Hz
Drive units	PEGA-SEW Eurodrive	
Power cable guiding system:	Collecting basket or cable trolley	

WEIGHTS


Base unit and enclosure	10100 lb
Cage weight	7055 lb
Mast section with 1 racks	331 lb
Mast section with 2 racks	386 lb

CONTROL SYSTEM

Joystick control or keypad

Standard:

- All lifts equipped with frequency controlled drives, overload protection
- Variety of optional equipment
- Different masts and tie- systems to meet all kind of application demands
- Doors installations in different positions and combinations

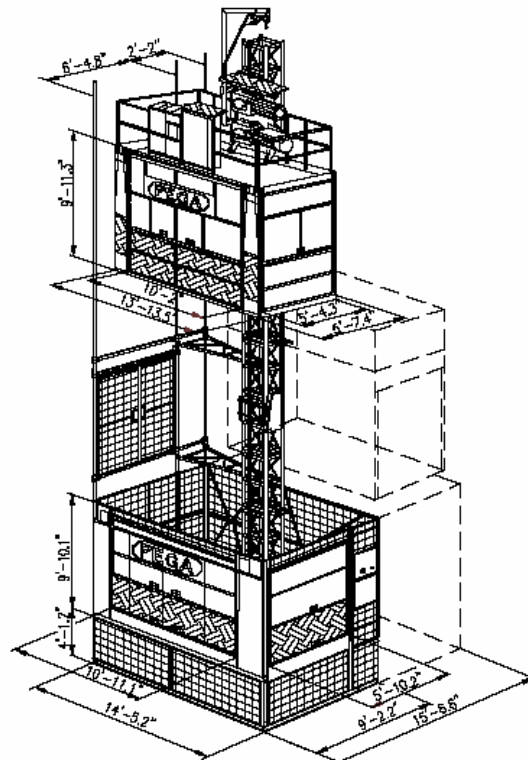

Ref00123

CONSULT - RENT - SALE - SERVICE

PEGA HOIST Ltd.

Na Skrivanku 209
262 51 Dublovice
Tel. : +420 318 821 572, 318 521 592
Fax : +420 318 875 620
E-mail : info@pega-hoist.com
www.pega-hoist.com

Local representative

Pictures are illustrative only and do not necessarily show the configuration of products on the market at a given point of time. Products must be used in conformity with safe practice and applicable statues regulations, codes and ordinances. Specifications of products and equipment shown herein are subject to change without notice.